



4700 W. 160th St.
Cleveland, OH 44135
PH: 800-321-9532
FX: 800-321-9535
www.oatey.com



TECHNICAL SPECIFICATION

**GALVANIZED BASE
NO-CALK®
ROOF FLASHINGS**



Engineering Specification: Oatey Galvanized Base No-Calk Roof Flashings can be used in commercial and residential applications where a watertight seal for roof penetrations around the plumbing vent pipe is required.

Job Reference

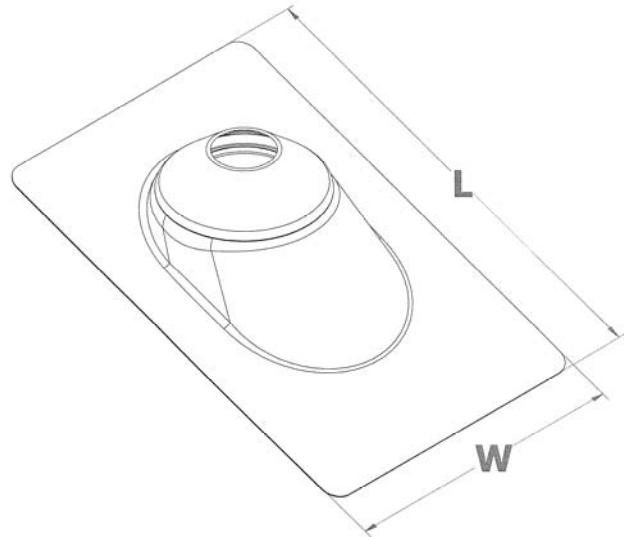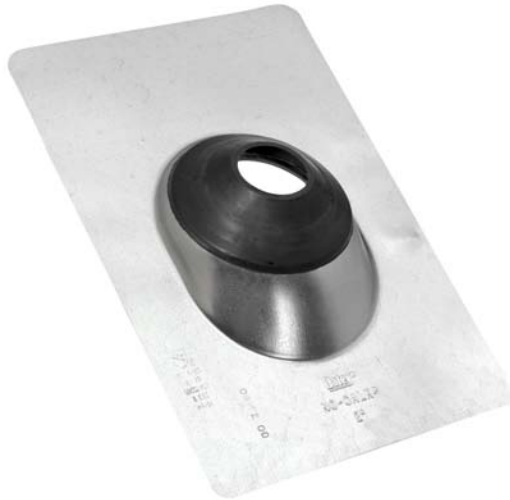

(All dimensions in inches)

- ◆ Roof Flashing slides over DWV pipe for pitch to 40°
- ◆ Made of rust-proof, stamped 24 or 28 gauge galvanized steel
- ◆ Non-fading sealing collar
- ◆ Approved for Type B installations
- ◆ Not for hot-mopped or built-up roofs
- ◆ Do not use paint or petroleum based products on rubber collars

✓	Product No.	Description	Length (L)	Width (W)	PACK	CARTON WEIGHT
	11830	1/2" – 1" Galvanized No-Calk Roof Flashing – Solar	12-1/2	9	12	11 lbs.
	11831	1/2" – 1" Galvanized No-Calk Roof Flashing – Solar	18	18	12	23 lbs.
	11840	1-1/4" – 1-1/2" Galvanized No-Calk Roof Flashing	12-1/2	9	12	12 lbs.
	11841	1-1/4" – 1-1/2" Galvanized No-Calk Roof Flashing	12-1/2	9	6	6 lbs.
	11853	2" Galvanized No-Calk Roof Flashing	12-1/2	9	12	12 lbs.
	11854	2" Galvanized No-Calk Roof Flashing	12-1/2	9	6	7 lbs.
	11866	3" Galvanized No-Calk Roof Flashing	14-1/2	11	12	17 lbs.
	11867	3" Galvanized No-Calk Roof Flashing	14-1/2	11	6	9 lbs.
	11879	4" Galvanized No-Calk Roof Flashing	15	12	12	23 lbs.
	11880	4" Galvanized No-Calk Roof Flashing	15	12	6	12 lbs.
	11960	1-1/4" – 1-1/2" Galvanized No-Calk Roof Flashing – 28 Gauge	14	14	12	23 lbs.
	11961	2" Galvanized No-Calk Roof Flashing – 28 Gauge	14	14	12	23 lbs.
	11921	1-1/4" – 1-1/2" Large Base Galvanized No-Calk Roof Flashing	18	18	12	23 lbs.
	11934	2" Large Base Galvanized No-Calk Roof Flashing	18	18	12	23 lbs.
	11947	3" Large Base Galvanized No-Calk Roof Flashing	18	18	12	23 lbs.
	11950	4" Large Base Galvanized No-Calk Roof Flashing	18	18	12	26 lbs.



IAPMO Listed



653

Data is subject to manufacturing tolerances.